

Lift tables

BOLZONI
AURAMO 


Lift tables



Quality and Safety

One of our main objectives is to provide the highest quality possible for products introduced on to the market.


Our quality system is based on systematic written "instructions", constantly verified and updated regulating every action inside the Company. In 1991 the concepts and standards of "total quality" were introduced and in 1994 we received ISO 9001 certification. All our products have the "CE" mark.

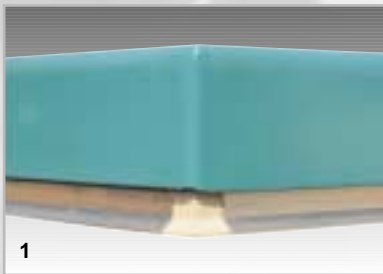

1




2

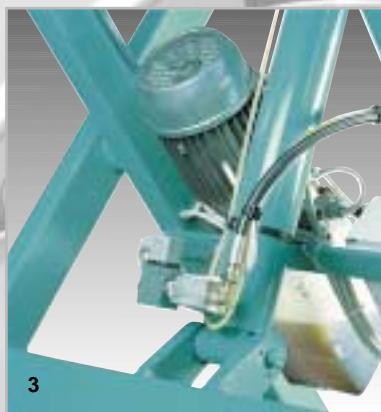

3



4

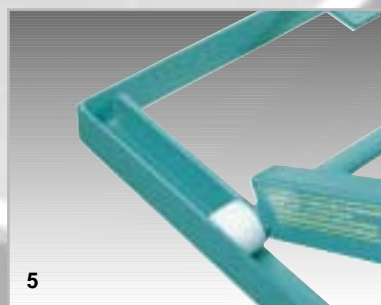

5

The wide range of Bolzoni Auramo lift tables, with their usual safety and reliability features provide an effective solution to most lifting problems.

The safety of the operator during the use of our lift tables is paramount.

Our tables comply with the European Safety of Machinery standards EN 292, Machinery Directive 98/37/EC and Safety requirements for lift tables EN 1570. All models include:

- Aluminium safety bar, stopping descent of the platform on contact with obstructions (fig. 1)
- Safety clearance between scissors to prevent trapping during operation (fig. 2)
- Safety check valve to stop the lift table lowering in the unlikely event of a hose break (fig. 3)
- Protection against overloading
- Low voltage control box with up-down buttons and emergency stop (fig. 4)
- Maintenance props (for safe maintenance operation) (fig. 5)
- Removable lifting eyes to facilitate handling and lift table installation.

We have a wide range of tables and options available to meet different requirements. Due to our wide experience we are able to provide customized solutions.


For prices and specification please contact us.

To augment the safety by increasing the productivity

Type 1-E Ergo-Lift single scissor for evenly distributed load

Designed as a "work station" to provide improved ergonomic conditions to ensure the health, safety and comfort of the operator together with improved productivity.

- load applied: evenly distributed
- top platform smooth surface
- max. 20 cycles per hour, one shift a day (for more intense operations please consult with us)
- single acting hydraulic cylinders with drainage
- upper and lower travel limited by mechanical stops (for intermediate stopping please consult with us)
- self lubricating bearings on pivot points
- hydraulic power pack inside the table provided with relief valve against overloading and compensated flow valve for controlled lowering speed
- electrical equipment controlled by electronic system, with low voltage transformer and thermal overload protection
- wide range of accessories available to achieve even higher safety functions where conditions require.

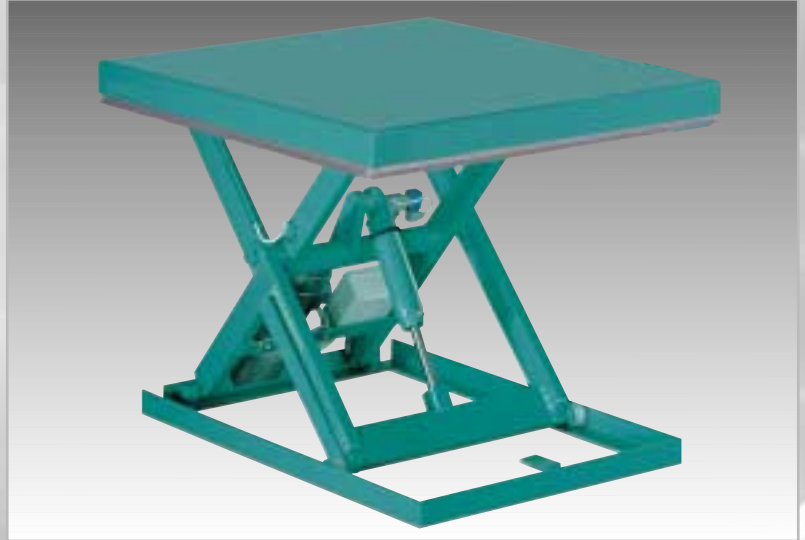

Type	Capacity	Lifting height	Platform	Collapsed height	Motor	Cylinder	Lifting time
	Kg	(E) mm	(AxB) mm	(H) mm	Kw	n. Ø	Sec.
A1.05.E00	500	590	1000x 800	200	0,55	1 60	10
A1.05.E01	500	800	1250x 800	200	0,55	1 60	13
A1.05.E02	500	800	1250x1000	200	0,55	1 60	13
A1.05.E03	500	1000	1500x 800	220	0,55	1 60	20
A1.05.E04	500	1000	1500x1000	220	0,55	1 60	20
A1.05.E05	500	1200	1800x 800	240	0,75	1 60	22
A1.05.E06	500	1200	1800x1000	240	0,75	1 60	22
A1.10.E00	1000	590	1000x 800	200	0,55	2 60	20
A1.10.E01	1000	800	1250x 800	200	0,55	2 60	26
A1.10.E02	1000	800	1250x1000	200	0,55	2 60	26
A1.10.E03	1000	1000	1500x 800	220	0,55	2 60	40
A1.10.E04	1000	1000	1500x1000	220	0,55	2 60	40
A1.10.E05	1000	1200	1800x 800	240	0,75	2 60	44
A1.10.E06	1000	1200	1800x1000	240	0,75	2 60	44
A1.10.E07	1000	1600	2250x 800	280	1,1	1 90	37
A1.10.E08	1000	1600	2250x1000	280	1,1	1 90	37

Type	Capacity	Lifting height	Platform	Collapsed height	Motor	Cylinder	Lifting time
	Kg	(E) mm	(AxB) mm	(H) mm	Kw	n. Ø	Sec.
A1.15.E01	1500	800	1350x 800	250	0,75	1 90	32
A1.15.E02	1500	800	1350x1000	250	0,75	1 90	32
A1.15.E03	1500	950	1500x 800	260	0,75	1 90	36
A1.15.E04	1500	950	1500x1000	260	0,75	1 90	36
A1.15.E05	1500	1200	1800x 800	270	1,1	1 90	24
A1.15.E06	1500	1200	1800x1000	270	1,1	1 90	24
A1.20.E01	2000	800	1350x 800	250	1,1	1 110	24
A1.20.E02	2000	800	1350x1000	250	1,1	1 110	24
A1.20.E03	2000	950	1500x 800	260	1,1	1 110	27
A1.20.E04	2000	950	1500x1000	260	1,1	1 110	27
A1.20.E05	2000	1200	1800x 800	270	1,1	1 110	37
A1.20.E06	2000	1200	1800x1000	270	1,1	1 110	37

Heavy duty lift tables

Type 1-A single scissor for partially concentrated loads

- designed for heavy duty applications solving problems throughout industry (as part of a production process, for machine feeding or stacking etc.)
- load applied: partially concentrated
- top platform smooth surface
- max. 30 cycles per hour, one shift a day (for more intense operations please consult with us)
- single acting hydraulic cylinders with drainage
- upper travel limit switch
- self lubricating bearings on pivot points
- hydraulic power pack inside the table provided with relief valve against overloading and compensated flow valve for controlled lowering speed
- electrical equipment controlled by electronic system, with low voltage transformer and thermal overload protection.



Type	Capacity Kg	Lifting height (E) mm	Platform (AxB) mm	Collapsed height (H) mm	Motor Kw	Cylinder n. Ø	Lifting time Sec.
A1.10.A01	1000	800	1400x 800	300	1,1	1 90	16
A1.10.A02	1000	800	1400x1000	300	1,1	1 90	16
A1.10.A03	1000	1100	1700x1000	300	1,1	1 90	22
A1.10.A04	1000	1100	1700x1200	300	1,1	1 90	22
A1.10.A05	1000	1300	2000x1000	320	1,1	1 90	29
A1.10.A06	1000	1300	2000x1200	320	1,1	1 90	29
A1.10.A37	1000	1600	2500x1200	350	1,5	1 90	28
A1.10.A38	1000	1600	2500x1500	350	3 2	90	34
A1.10.A39	1000	2000	3000x1200	350	3 2	90	45
A1.10.A40	1000	2000	3000x1500	350	3 2	90	45
A1.10.A41	1000	2000	3000x2000	350	3 2	90	45
A1.20.A01	2000	800	1400x 800	300	1,5	1 110	16
A1.20.A02	2000	800	1400x1000	300	1,5	1 110	16
A1.20.A03	2000	1100	1700x1000	300	1,5	1 110	23
A1.20.A04	2000	1100	1700x1200	300	1,5	1 110	23
A1.20.A05	2000	1300	2000x1000	320	1,5	1 110	30
A1.20.A06	2000	1300	2000x1200	320	1,5	1 110	30
A1.20.A37	2000	1600	2500x1200	350	3 2	90	34
A1.20.A38	2000	1600	2500x1500	350	3 2	90	34
A1.20.A39	2000	2000	3000x1200	350	3 2	90	43
A1.20.A40	2000	2000	3000x1500	350	3 2	90	43
A1.20.A41	2000	2000	3000x2000	350	3 2	90	43
A1.20.A42	2000	2000	3500x1500	350	3 2	90	46
A1.20.A43	2000	2000	3500x2000	350	3 2	90	46
A1.30.A01	3000	850	1500x1000	350	2,2	2 90	22
A1.30.A02	3000	850	1500x1200	350	2,2	2 90	22
A1.30.A03	3000	1200	2000x1000	350	3 2	90	25
A1.30.A04	3000	1200	2000x1200	350	3 2	90	25
A1.30.A33	3000	1600	2500x1200	380	3 2	90	35
A1.30.A34	3000	1600	2500x1500	380	3 2	90	35
A1.30.A35	3000	2000	3000x1500	380	4 2	110	47

Type	Capacity Kg	Lifting height (E) mm	Platform (AxB) mm	Collapsed height (H) mm	Motor Kw	Cylinder n. Ø	Lifting time Sec.
A1.30.A36	3000	2000	3000x2000	380	4 2	110	47
A1.30.A37	3000	2000	3500x 1500	400	4 2	110	50
A1.30.A38	3000	2000	3500x2000	400	4 2	110	50
A1.50.A21	5000	1600	2500x 1500	450	4 2	110	37
A1.50.A22	5000	1600	2500x2000	450	4 2	110	37
A1.50.A25	5000	1800	3000x 1500	500	4 2	110	45
A1.50.A26	5000	1800	3000x2000	500	4 2	110	45
A1.50.A27	5000	1800	3500x2000	500	4 2	110	45
A1.50.A28	5000	1800	3500x2400	500	4 2	110	45
A1.50.A29	5000	2000	3500x2000	550	4 2	110	55
A1.50.A30	5000	2000	3500x2400	550	4 2	110	55
A1.50.A31	5000	2000	4000x2400	550	4 2	110	55
A1.70.A11	7000	1500	2500x 1500	550	4 2	120	45
A1.70.A12	7000	1500	2500x2000	550	4 2	120	45
A1.70.A15	7000	1800	3000x 1500	600	4 2	120	55
A1.70.A16	7000	1800	3000x2000	600	4 2	120	55
A1.70.A17	7000	1800	3500x2000	600	4 2	120	55
A1.70.A18	7000	2000	3500x2000	600	4 2	120	64
A1.70.A19	7000	2000	3500x2400	600	4 2	120	64
A1.70.A20	7000	2000	4000x2400	600	4 2	120	64

Low profile lift tables not requiring a floor pit

Low profile lift tables, due to their low closed height, do not require a floor pit, offering flexibility of location and keeping installation costs to a minimum.

Two versions are available, either full top platform or "U" shaped, which is particularly useful when loading a pallet safely onto the table using a hand pallet or pedestrian truck without the need for an access ramp.

- max. 20 cycles per hour, one shift a day (for more intense operations please consult with us)

- single acting hydraulic cylinders with drainage
- upper travel limit switch
- self lubricating bearings on pivot points
- remote hydraulic power pack provided with relief valve against overloading and compensated flow valve for controlled lowering speed; push button control box fixed on a stand for easier operation
- electrical equipment controlled by electronic system, with low voltage transformer and thermal overload protection



Type A8.U shaped top platform for evenly distributed load

Type	Capacity	Lifting height	Platform	Collapsed height	Motor	Cylinder		Lifting time
	Kg	(E) mm	(AxB) mm	(H) mm	Kw	n.	Ø	Sec.
A8.10.U01	1000	780	1420x1140	80	0,75	2	60	18
A8.15.U01	1500	750	1550x1160	92	1,1	2	70	20


Type A8.C full top platform for evenly distributed load

Type	Capacity	Lifting height	Platform	Collapsed height	Motor	Cylinder		Lifting time
	Kg	(E) mm	(AxB) mm	(H) mm	Kw	n.	Ø	Sec.
A8.05.C01	500	780	1400x 800	82	0,75	1	60	12
A8.05.C02	500	780	1400x1000	82	0,75	1	60	12
A8.05.C03	500	780	1600x 800	82	0,75	1	60	12
A8.05.C04	500	780	1600x1000	82	0,75	1	60	12
A8.10.C01	1000	780	1400x 800	82	0,75	2	60	18
A8.10.C02	1000	780	1400x1000	82	0,75	2	60	18
A8.10.C03	1000	780	1600x 800	82	0,75	2	60	18
A8.10.C04	1000	780	1600x1000	82	0,75	2	60	18
A8.15.C01	1500	750	1550x 800	92	1,1	2	70	20
A8.15.C02	1500	750	1550x1000	92	1,1	2	70	20
A8.15.C03	1500	750	1700x 800	92	1,1	2	70	20
A8.15.C04	1500	750	1700x1000	92	1,1	2	70	20
A8.20.C01	2000	750	1600x1000	95	1,1	2	70	25
A8.20.C02	2000	750	1600x1200	95	1,1	2	70	25



...Easy to move just where you need them!!

It is now possible to transport low profile tables easily and in safety by a "mobility kit" from one work station to another, providing an even higher flexibility in use.

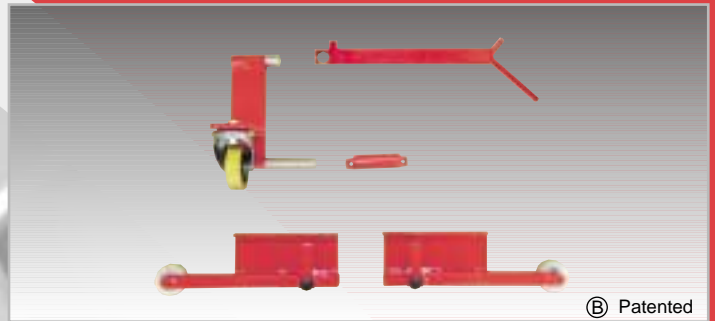

Transport of the low profile full top version, without the load. Mobility kit to transport the table "U" shaped platform, without the load, by a hand pallet truck.



High-Lift Hand Pallet Truck

This hand pallet truck combines the manoeuvrability of a hand pallet truck and the lifting function of a lift table. The hydraulic pump which is operated by hand, is fitted with a valve to differentiate the lifting speed when the hand pallet truck is loaded or unloaded and it allows lifting of the forks up to 800 mm off the ground.

In order to avoid the transport of loads at a height too far off the ground, this hand pallet truck is fitted with side stabilisers which come out automatically, when the forks are over 400 mm off the ground.

Capacity 1000 Kg					(dimensions in mm)	
Fork length	Overall length	Overall width	Width between the forks	Fork width	Fork height	Lifting stroke
1120	1495	530	210	160	85	800



Compact with high stroke

Vertical double scissor lifts to achieve greater stroke without increasing the platform size; mainly used to transfer goods from one level to another.

- load applied: evenly distributed for type 2E; partially concentrated for type 2A
- top platform smooth surface (safety tread surface specially recommended in case of transit of personnel)
- max. 15 cycles per hour, one shift a day for type 2E; 10 for type 2A (for more intense operations please consult with us)
- single acting hydraulic cylinders with drainage
- self lubricating bearings on pivot points
- hydraulic power pack inside the table provided with relief valve against overloading and compensated flow valve for controlled lowering speed
- electrical equipment controlled by electronic system, with low voltage transformer and thermal overload protection



Type Ergo-Lift 2-E double scissor for evenly distributed loads

Type	Capacity	Lifting height	Platform	Collapsed height	Motor	Cylinder	Lifting time
	Kg	(E) mm	(AxB) mm	(H) mm	Kw	n. Ø	Sec.
A2.05.E01	500	1600	1300x 800	320	0,55	1 60	29
A2.05.E02	500	1600	1300x1000	320	0,55	1 60	29
A2.05.E03	500	2000	1700x 800	350	0,55	1 60	38
A2.05.E04	500	2000	1700x1000	350	0,55	1 60	38
A2.10.E01	1000	1600	1300x 800	360	0,75	2 60	38
A2.10.E02	1000	1600	1300x1000	360	0,75	2 60	38
A2.10.E03	1000	2000	1700x 800	380	1,1	2 60	38
A2.10.E04	1000	2000	1700x1000	380	1,1	2 60	38

Type Ergo-Lift 2-A double scissor for partially concentrated loads

Type	Capacity	Lifting height	Platform	Collapsed height	Motor	Cylinder	Lifting time
	Kg	(E) mm	(AxB) mm	(H) mm	Kw	n. Ø	Sec.
A2.10.A05	1000	2500	2000x1000	450	1,1	2 60	48
A2.10.A06	1000	2500	2000x1200	450	1,1	2 60	48
A2.10.A28	1000	2900	2500x1000	550	3	2 70	44
A2.10.A29	1000	2900	2500x1200	550	3	2 70	44
A2.20.A01	2000	1600	1400x1000	450	1,1	2 70	42
A2.20.A02	2000	1600	1400x1200	450	1,1	2 70	42
A2.20.A03	2000	2000	1700x1000	500	1,1	2 70	51
A2.20.A04	2000	2000	1700x1200	500	1,1	2 70	51
A2.20.A05	2000	2400	2000x1000	500	1,5	2 70	64
A2.20.A06	2000	2400	2000x1200	500	1,5	2 70	64
A2.20.A26	2000	2900	2500x1200	600	3	2 90	70
A2.20.A28	2000	2900	2500x1500	600	3	2 90	70
A2.20.A29	2000	3500	3000x1500	650	4	2 90	66
A2.30.A21	3000	1500	1500x1200	600	3	1 120	30
A2.30.A22	3000	1800	1800x1200	600	3	2 90	44
A2.30.A23	3000	2300	2000x1200	600	4	2 110	68
A2.30.A24	3000	2900	2500x1200	600	4	2 110	80
A2.30.A25	3000	3500	3000x1500	650	4	2 110	95
A2.30.A26	3000	3500	3000x2000	650	4	2 110	95


Loading Lift Tables

Used to load and unload vehicles by pedestrian or fork lift trucks without a loading dock and designed to operate with maximum safety for off-centred crossing loads;

- safety tread top platform surface
- max. 15 cycles per hour, one shift a day (for more intense operations please consult with us)
- single acting hydraulic cylinders with drainage
- upper travel limit switch
- check valve on each cylinder for higher stability (type IT)
- solenoid check valve between the cylinders (type 1S)
- self lubricating bearings on pivot points
- hydraulic power pack inside the table provided with relief valve against overloading and compensated flow valve for controlled lowering speed
- electrical equipment controlled by electronic system, with low voltage transformer and thermal overload protection
- wide range of options available such as wheel stops, goal post barriers, safety handrails, manual bridge plates etc to meet specific requirements




OPTIONS




Bridge plate



Roll-off stop



Safety handrails



Goal post



Type 1-S
single scissor lift tables
for loading by pedestrian truck



Type 1-T
single scissor lift tables
for loading by forklift truck

Type	Capacity	Lifting height	Platform	Collapsed height	Motor	Cylinder		Lifting time
	Kg	(E) mm	(AxB) mm	(H) mm	Kw	n.	Ø	Sec.
A1.10.S01	1000	1600	2500x 1200	350	1,5	1	90	28
A1.10.S12	1000	2000	3000x 1500	350	3	2	90	45
A1.10.S13	1000	2000	3000x2000	350	3	2	90	45
A1.20.S11	2000	1600	2500x 1500	350	3	2	90	34
A1.20.S12	2000	1600	2500x2000	350	3	2	90	34
A1.20.S13	2000	2000	3000x 1500	350	3	2	90	43
A1.20.S14	2000	2000	3000x2000	350	3	2	90	43
A1.20.S15	2000	2000	3500x2000	350	3	2	90	46
A1.30.S11	3000	1600	2500x 1500	380	3	2	90	35
A1.30.S12	3000	1600	2500x2000	380	3	2	90	35
A1.30.S13	3000	2000	3000x 1500	380	4	2	110	47
A1.30.S14	3000	2000	3000x2000	380	4	2	110	47
A1.30.S15	3000	2000	3500x2000	400	4	2	110	50

Type	Capacity	Lifting height	Platform	Collapsed height	Motor	Cylinder		Lifting time
	Kg	(E) mm	(AxB) mm	(H) mm	Kw	n.	Ø	Sec.
A1.40.T00	4000	1600	2500x2000	500	4	2	110	30
A1.40.T01	4000	1600	3000x2000	500	4	2	110	30
A1.40.T02	4000	1800	3000x2000	550	4	2	110	36
A1.40.T03	4000	1800	3000x2400	550	4	2	110	36
A1.40.T04	4000	1800	3500x2400	550	4	2	110	36
A1.40.T05	4000	2000	3500x2000	550	4	2	110	55
A1.40.T06	4000	2000	3500x2400	550	4	2	110	55
A1.40.T07	4000	2000	4000x2400	550	4	2	110	55
A1.60.T00	6000	1500	2500x2000	550	4	2	120	45
A1.60.T01	6000	1800	3000x2000	600	4	2	120	42
A1.60.T02	6000	1800	3000x2400	600	4	2	120	42
A1.60.T03	6000	1800	3500x2400	600	4	2	120	42
A1.60.T05	6000	2000	3500x2000	600	4	2	120	64
A1.60.T06	6000	2000	3500x2400	600	4	2	120	64
A1.60.T07	6000	2000	4000x2400	600	4	2	120	64
A1.80.T00	8000	1500	2500x2000	600	4	2	130	52
A1.80.T01	8000	1800	3000x2000	650	4	2	130	50
A1.80.T02	8000	1800	3000x2400	650	4	2	130	50
A1.80.T03	8000	1800	3500x2400	650	4	2	130	50
A1.80.T05	8000	2000	3500x2000	650	4	2	130	75
A1.80.T06	8000	2000	3500x2400	650	4	2	130	75
A1.80.T07	8000	2000	4000x2400	650	4	2	130	75
A1.A0.T00	10000	1500	2500x2000	650	5,5	2	140	51
A1.A0.T05	10000	2000	3500x2000	700	5,5	2	140	68
A1.A0.T06	10000	2000	3500x2400	700	5,5	2	140	68
A1.A0.T07	10000	2000	4000x2400	700	5,5	2	140	68

Tandem scissor lift tables

Designed to handle extra long or heavy loads whilst keeping the closed dimension to a minimum.

Composed of two mechanically synchronised scissors mechanisms to obtain maximum stability.

- load applied: evenly distributed for type 5E; partially concentrated for type 5A
- top platform smooth surface
- max. 20 cycles per hour, one shift a day (for more intense operations please consult with us)
- single acting hydraulic cylinders with drainage
- upper travel limit switch
- self lubricating bearings on pivot points
- hydraulic power pack inside the table provided with relief valve against overloading and compensated flow valve for controlled lowering speed
- electrical equipment controlled by electronic system, with low voltage transformer and thermal overload protection




Type Ergo-Lift 5-E
for evenly distributed load

Type	Capacity	Lifting height	Platform	Collapsed height	Motor	Cylinder		Lifting time
	Kg	(E) mm	(AxB) mm	(H) mm	Kw	n.	Ø	Sec.
A5.05.E01	1000	800	2500x 800	200	0,75	2	60	25
A5.05.E02	1000	800	2500x1000	200	0,75	2	60	25
A5.05.E03	1000	1000	3000x 800	220	0,75	2	60	35
A5.05.E04	1000	1000	3000x1000	220	0,75	2	60	35
A5.05.E05	1000	1200	4000x 800	240	0,75	2	60	46
A5.05.E06	1000	1200	4000x1000	240	0,75	2	60	46
A5.10.E01	2000	800	2500x 800	200	1,1	4	60	25
A5.10.E02	2000	800	2500x1000	200	1,1	4	60	25
A5.10.E03	2000	1000	3000x 800	220	1,1	4	60	35
A5.10.E04	2000	1000	3000x1000	220	1,1	4	60	35
A5.10.E05	2000	1200	4000x 800	240	1,1	4	60	46
A5.10.E06	2000	1200	4000x1000	240	1,1	4	60	46
A5.20.E11	4000	950	3200x 800	260	1,5	2	110	40
A5.20.E12	4000	950	3200x1000	260	1,5	2	110	40
A5.20.E13	4000	1200	3800x 800	270	1,5	2	110	55
A5.20.E14	4000	1200	3800x1000	270	1,5	2	110	55


Type 5-A
for partially concentrated load

Type	Capacity	Lifting height	Platform	Collapsed height	Motor	Cylinder		Lifting time
	Kg	(E) mm	(AxB) mm	(H) mm	Kw	n.	Ø	Sec.
A5.10.A02	2000	1000	3500x1000	300	1,5	2	90	30
A5.10.A04	2000	1600	5000x1000	350	3	2	90	35
A5.20.A02	4000	1000	3500x1000	300	3	2	110	28
A5.20.A04	4000	1600	5000x1200	350	4	4	90	48
A5.30.A02	6000	1600	5000x1200	380	4	4	90	50
A5.30.A04	6000	1600	5000x2000	380	4	4	90	50


Options




Manual circular turntable




Gravity roller conveyor




Tilting top platform




Lower frame with fork pockets




Lower frame on wheels
(to move the table without load)




Lower frame on wheels
(to move the table without the load)




PVC bellow




PVC rolling curtains




Mesh curtain




Yellow-black strips on top platform side




Connecting ramp




Manual bridge plate



Roll-off stop



Safety handrails



Top reinforcement for transit of truck

BOLZONI AURAMO

**BOLZONI S.p.A.**

29027 Casoni di Podenzano
(Piacenza) Italy
Tel: +39-0523-55 55 11
Fax: +39-0523-52 40 87
Internet: www.bolzoni-auramo.com
E-mail: sales.it@bolzoni-auramo.com

AURAMO OY

P.O.Box 78 (Valimotie 22)
01511 Vantaa - Finland
Tel: +358-9-82 931
Fax: +358-9-87 01 037
E-mail: sales.fi@bolzoni-auramo.com

BOLZONI AURAMO LTD

Unit 10, Taurus Park
Europa Boulevard
West Brook
Warrington Cheshire WA5 7ZT
United Kingdom
Tel: +44-1925-62 45 70
Fax: +44-1925-62 45 78
E-mail: sales.uk@bolzoni-auramo.com

BOLZONI AURAMO SARL

Rue Avogadro
Technopôle de Forbach-Sud
57600 Forbach - France
Tel: +33-3-87 84 65 40
Fax: +33-3-87 84 65 45
E-mail: sales.fr@bolzoni-auramo.com

BOLZONI AURAMO GmbH

Mühlenstr. 74
41352 Korschenbroich - Germany
Tel: +49-2161-999-36-0
Fax: +49-2161-999-36-99
E-mail: sales.de@bolzoni-auramo.com

BOLZONI AURAMO S.L.

Polig. Industrial Riera de Caldes
C/ dels Basters, 12-14 -
Apdo. 62,
08184 Palau solità i Plegamans
(Barcelona) Spain
Tel: +34-938-648-633
Fax: +34-938-648-350
E-mail: sales.es@bolzoni-auramo.com

Lisboa Office - Portugal

Tel / Fax: +351-212-902551
Tel móvil: +351-917-884976
E-mail: lsilva@bolzoni-auramo.com

BOLZONI AURAMO AB

P.O.Box 172
80103 Gävle - Sweden
Tel: +46-26-64 72 30
Fax: +46-26-64 72 35
E-mail: sales.se@bolzoni-auramo.com

BOLZONI AURAMO S.r.l.

S.S. 16 Km 770+580
70052 Bisceglie (BA) Italy
Tel: +39-080-39 51 437
Fax: +39-080-39 51 393
E-mail: sales.it@bolzoni-auramo.com

BRUDI BOLZONI AURAMO INC.

17635 Hoffman Way
Homewood, Illinois 60430 - U.S.A.
Tel: +1-800-358 54 38 (USA only)
Tel: +1-708-957 88 09
Fax: +1-708-957 88 32
E-mail: sales.us@bolzoni-auramo.com

BRUDI BOLZONI AURAMO Ltd.

90C Brunswick Blvd
Dollard-des-Ormeaux, Quebec H9B 2C5
Canada
Tel: +1-800-685-78 71 (Canada only)
Tel: +1-514-685-78 71
Fax: +1-514-685-52 38
E-mail: sales.ca@bolzoni-auramo.com

BOLZONI AURAMO S.A.

Av.Isidora Goyenechea 2925
Office 103
Las Condes
Santiago - Chile
Tel: +56-2-374 09 99
Fax: +56-2-374 03 68
E-mail: sales.cl@bolzoni-auramo.com

BOLZONI AURAMO (Pty) Ltd.

P.O.Box 7198
Baulkham Hills DC
NSW 2153 - Australia
Tel: +61-2-9659-22 24
Fax: +61-2-9659-22 25
E-mail: sales.au@bolzoni-auramo.com

RT FORK HOIST SERVICES

58, Hobill Avenue
Manukau City,
Auckland - New Zealand
Tel: +64-9-262 07 21
Fax: +64-9-262 05 67
E-mail: christ@rtforkhoist.co.nz

KOLBUD Sp. z.o.o.

85-739 Bydgoszcz,
ul. Fordonska 183
Poland
Tel: +48 52 345 28 55
Fax: +48 52 345 28 54
E-mail: kolbud@kolbud.com.pl

MAX URECH

Lager- und Fördertechnik
Parallelstrasse 4
5606 Dintikon
Switzerland
Tel: +41 56 616 7010
Fax: +41 56 616 7020
E-mail: info@max-urech.ch

LTF Liften B.V.

P.O. Box 40245 - 3504 AA Utrecht
Fermiweg 51 - 3542 CB Utrecht
The Netherlands
Tel: +31 30241 4141
Fax: +31 30241 1672
E-mail: sales@ltf.nl

